

Global Leader in Quality and Reliability

For more than 100 years, Thermo Scientific centrifuges have delivered outstanding performance and reliability in the lab. From basic benchtop instruments to advanced floor models, we take pride in manufacturing centrifuges that offer exceptional quality for consistent results year after year.

Thermo Scientific Heraeus Megafuge Series

The Thermo Scientific Heraeus Megafuge general purpose centrifuge series, provides industry-leading capacity and ergonomics at an exceptional value for everyday sample preparation — clinical protocols, cell culture applications, microplate processing and a variety of separation needs.



4x400 ml Heraeus Megafuge



4x750 mlHeraeus Megafuge



Unparalleled Throughput

Accelerate productivity with unmatched capacity in minimum bench space

32 to 76 x 5/7 ml blood tubes with the TX-200 or TX-400 rotors

Up to 16 x 50 ml conical tubes in our standard TX-400 swing-out rotor

Up to $108 \times 5/7$ ml blood tubes or 28×50 ml conical tubes with the TX-750 rotor

Up to $196 \times 5/7$ ml blood tubes or up to 40×50 ml conical tubes with the high capacity BIOLiner rotor

Exceptional Ergonomics

Achieve safe, simple and comfortable daily operation with our breakthrough innovations, while operating at a convenient working height of only 31 cm/ 12.4 in.

Exceptional Capacity Boosts Productivity

Our Heraeus® Megafuge® 16 and Megafuge 40 centrifuge series are available in both ventilated and refrigerated units, ideal for a range of routine applications and temperature-sensitive sample processing with control between -10°C and +40°C.

Breakthrough Thermo Scientific Technologies



Auto-Lock® III Rotor System Secure locking system delivers:

- Installation and exchange of rotors with just the push of a button for quick switch between applications
- Easy chamber access enables cleaning convenience, reducing contamination risk and leading to improved research and a healthier working environment

ClickSeal® Bucket Sealing System Innovative biocontainment solution provides:

- Simple operation eliminating screw caps and complicated clips
- Glove-friendly, one-handed open/close capability
- Biocontainment certification by HPA, Porton Down, UK (formerly CAMR).
- Transparent and biocompatible polyetherimide (PEI) sealing covers have broad chemical resistance, excellent thermal properties and exceptional strength for durability

Fiberlite® Carbon Fiber Rotors

 Maximize centrifuge performance with increased capacity, faster speeds and higher g-force

Motorized Lid Latch

- One finger downward motion for easiest closing and locking – even on tall benches
- Optional automatic lid opening at end of run

Compact, Comfortable Design

- Exceptional capability in compact dimensions maximizes workspace
- Low profile and curved design ensure comfortable loading and unloading of samples and cleaning of the unit

SMARTSpin® Technology

 Dynamic technology improves safety and run results by considering chamber temperature, rotor and bucket combination and selected speed to auto-correct maximum rotor speed, calibrate the imbalance detector and optimize motor power during acceleration and braking





energy savings

Advanced Technology for Resource Efficiency

- > Less energy is consumed per tube up to 40% fewer watts per tube than competing models - since larger capacity reduces number of runs required for a given batch of samples
- > 15% energy savings compared with standard stand-by power consumption with unique "powersave" feature, enabled by default, that turns off display when not in use
- > Reduce capital investment and eliminate unnecessary equipment disposal issues with longer lifetime of Fiberlite rotors – guaranteed 15 years
- Compliance with RoHS (Restriction of Hazardous Substances Directive) and WEE (Waste Electrical and Electronic Equipment Directive)

Intuitive Controls Simplify Operation



The Heraeus Megafuge centrifuge series features easy-to-use controls with detailed information on a wide range of operating parameters and processing status.

Dedicated Program Keys

Immediate storage and access to your most frequently used programs with unique writing area for naming programs

Accessible Programming

Easily adjust speed, time and temperature, even during the run

Easy to Read and Use

- Highly visible, backlit display for clear reading of parameters from across the lab
- Multilingual instructions, including English, German, French, Spanish, Russian, Italian and Dutch, on programming, run conditions, alerts and service messages
- Glove- and detergent-friendly panel



Program Keys

Direct access to 6 most frequently used programs with one keystroke save and recall.



Dataport Option

To transport data to a PC, a dataport kit is available (cat. no. 50124205 for Heraeus Megafuge 16 Centrifuge series and 20190345 for Heraeus Megafuge 40 Centrifuge series)

Speed Control:

Immediate toggle between RCF and speed control up to 25830 x g or 15200 rpm

Temp: (refrigerated unit)

Control temperatures between -10°C and +40°C

Pre-Temp: (refrigerated unit)

Achieve 4°C from ambient 23°C in 15 minutes*

Accel/Decel: Choice of 9

acceleration and 10 deceleration rates

*with Thermo Scientific BIOLiner rotor



Looking for high-performance processing?

See our new Thermo Scientific Heraeus Multifuge Series

The one-liter Heraeus Multifuge® X1 and three-liter Heraeus Multifuge X3 general purpose centrifuges deliver exceptional, market-leading performance, capacity and throughput.

Advanced, intuitive controls with double temperature management system ensure the highest accuracy and maximum results of your sample processing.



Bucket:

Quickly adjust rotor parameters for optimal RCF calculation and temperature management

Pulse:

Ideal for short runs

Open:

Motorized latch with optional automatic opening



Incredible Capacity and Productivity




Our Heraeus Megafuge 16 and Megafuge 40 centrifuge series feature a wide range of Thermo Scientific rotors to meet your daily, routine processing requirements.


	Swinging Bucket Rotors	Heraeus Megafuge 16	Heraeus Megafuge 40
*	TX-200 High speed productivity >> Serving primary swing-out processing needs, with a capacity of 32 blood tubes or 4 conical tubes per run in sealed conditions, achieve an impressive mix of speed and accelerating/braking power.	5500 rpm 5580 xg	
*	TX-400 Maximum flexibility >> Designed for a broad range of laboratory throughput needs, with a capacity of 76 blood tubes and up to 16 conical tubes in a single run, for the highest configuration flexibility on the market.	5000 rpm 4696 xg	
	TX-750 Outstanding versatility >> Delivers maximum flexibility at 4700 rpm and features a choice of round or rectangular buckets with multiple adapters as well as microplate carriers		4700 rpm 4816 xg
*	BIOLiner ® Exceptional capacity >> Significantly improves productivity – process over 100% more 50 ml conical tubes or 100% more blood tubes with biocontainment sealing per run than with competitive models. Certified sealed microplate carriers expand application options.		3500 rpm 2739 xg
•	M-20 Compact processing >> Centrifuges up to 6 microplates in certified sealed conditions with transportable carriers and the versatility of Auto-Lock rotor installation.	4000 rpm 2272 xg	4000 rpm 2272 xg
*	BIOShield® 720 and BIOShield 1000A Excellent performance >> Runs frequently used tubes above 5500 xg with the confidence and simplicity of a single, certified biosafety lid.	5300 rpm 5088 xg BIOShield 720	5300 rpm 5590 xg BIOShield 1000A

-

Biocontainment certified by HPA, Porton Down, UK (formerly CAMR).

Tube Capacity Selector Guide



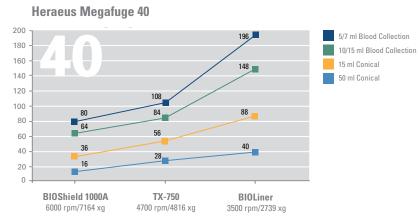

Rotors

	Fixed Angle Rotors	Heraeus Megafuge 16	Heraeus Megafuge 40
•	Fiberlite F15-6x100y Durable design for general purpose pelleting of organelles, density gradients and various protocols requiring angle centrifugation of disposable conical tubes up to 18516 xg.	13000 rpm 18516 xg	13000 rpm 18516 xg
WAT ME	CLINIConic ® Spin 30 x 15 ml round or conical tubes and ensure acceleration and throughput for cell culture and blood separation applications.	5650 rpm 4997 xg	
€	8x50 Sealed Ideal for TB sputum applications, centrifuge 8 conical tubes in individually sealed vessels, which can be prepared remotely, with rapid acceleration and processing times.	6700 rpm 7177 xg¹	
*	HIGHConic II Process 6 x 94 ml tubes between 10000 and 15000 xg in certified sealed conditions.	8500 rpm 10178 xg	10350 rpm 15090 xg
*	Micro-Volume Rotors Perfect blend of capabilities to support micro-volume protocols, such as nucleic acid or protein lysate preparation and PCR reaction set-up. With Auto-Lock rotor exchange, transform your general purpose unit into a powerful microcentrifuge in less than 3 seconds!		
4	Fiberlite F21-48x2		15200 rpm 25055 xg
CE	Microliter 30x2	15200 rpm 25830 xg	
*	Microliter 48x2		15200 rpm 25314 xg

¹ Performance with 230 V centrifuge models.

Thermo Scientific Fiberlite Rotors

Setting new performance standards for benchtop processing

Our carbon fiber rotors maximize the performance of Heraeus Megafuge centrifuges with versatility, speed and robust, corrosion-free design, now within your reach.

Unequalled durability and cleaning

convenience: Corrosion- and fatigue-resistance eliminate an ever-present hazard from the exposure of moisture, chemicals or alkaline solutions

Superior insulation: Naturally insulating properties ensure samples are kept at a constant temperature during centrifugation

Improved ergonomics and productivity:

Lightweight – design provides faster acceleration/deceleration rates for shorter run times, as well as a safer work environment

Exceptional value: A secure investment, backed by a 15-year warranty ensures dependable results over an extended lifetime



Rotor stand is now available to store your rotor when not in use, allowing rotors and buckets to be removed and kept simply and safely (cat. no. 75003711).



Thermo	o Scientifi	c Rotors and Adapters			Heraeus I 16/1	0 0	Heraeus M 40/40	0
Cat. No		Description	Rotor Capacity (Places x Volume)	Max Tube Dimensions (Ø x L, mm)	Max Speed (rpm)	Max RCF (xg)	Max Speed (rpm)	Max RCF (xg)
75003658	}	TX-200 Swinging Bucket Rotor*						
75003659	1	Round Buckets (set of 4), 90 °, R _{max} 165 mm	4 x 180 ml		5500 5250 ²	5580 5084 ²	n/a	n/a
75003660	١	ClickSeal Biocontainment Lids for Round Bucket	ts (set of 4)					
75003687		Replacement 0-rings for Lids (set of 4)						
		Adapters for Round Buckets (sets of 4)						
No adapter	needed 1	180 ml Polypropylene Screw Cap Bottle (75003800), pkg of 12) 4 x 180 ml	56.5 x 123				
75003801		100 ml Round Bottom Open-Top Tube	4 x 100 ml	48 x 122				
75003802	3	50 ml DIN Round Bottom Tube	4 x 50 ml	35 x 126				
75003815	4	50 ml Round Bottom Tube	4 x 50 ml	32 x 126				
75003803	5	50 ml Conical or Skirted Tube	4 x 50 ml	29.5 x 126				
75003804		25 ml Universal Tube	4 x 25 ml	25.5 x 118				
75003805	7	25 ml DIN Round/Flat Bottom Tube	8 x 25 ml	25 x 118				
75003806	8	20 ml Round Bottom Tube	12 x 25 ml	22 x 125				
75003771	9	15 ml Conical Tube	20 x 20 ml	17 x 121				
75003809	10	15 ml Blood Collection Tube	16 x 15 ml	17 x 121				
75003807	1	14 ml Conical Urine Tube	8 x 14 ml	17 x 114				
75003808	12	10 ml Blood Collection or 15 ml Corex®/Kimble® Tu	ube 28 x 10/15 ml	17 x 121				
75003785	13	5/7 ml or 4.5/6 ml Blood Collection Tube	32 x 5/7 ml	13 x 122				
75003810	14	5/7 ml Round Bottom Open-Top Tube	36 x 5/7 ml	13 x 118				
75003811	15	3/5 ml RIA or Round Bottom Tube (without cap)	48 x 3/5 ml	12 x 124				
75003812	16	1.5/2 ml Conical Microtube	48 x 2 ml	11 x 45				

¹ Buckets and lids sold separately

Swinging Bucket Rotors

² 120 V ventilated centrifuge



	Thermo Sci	ientifi	c Rotors and Adapters				Megafuge 16R	Heraeus M 40/40	0
	Cat. No		Description	otor Capacity (Places x Volume)	Max Tube Dimensions (Ø x L, mm)	Max Speed (rpm)	Max RCF (xg)	Max Speed (rpm)	Max RCF (xg)
	75003629		TX-400 Swinging Bucket Rotor						
	75003655		Round Buckets (set of 4), 90°, R _{max} 168 mm	4 x 400 ml		5000	4696	n/a	n/a
*	75003656		ClickSeal Biocontainment Lids for Round Buckets (set of 4)						
	75003657		Replacement O-rings for Lids (set of 4)						
			Adapters for Round Buckets (sets of 4)						
	No adapter neede		400 ml Polypropylene Bio-Bottle (75007585, pkg of 12)	4 x 400 ml	80 x 125				
	75003788	18	250 ml Thermo Scientific Nalgene Oak Ridge Bottle	4 x 250 ml	62 x 135				
	75003788	18	200 ml Thermo Scientific Nunc Conical Bottle + Nunc no. 377585	5 4 x 200 ml	62 x 125				
	75003788	18	225 ml and 175 ml BD Falcon™ Conical Bottle + BD no. 352090	4 x 175 ml	62 x 125				
	75003708	19	100 ml Round Bottom Open-Top Tube	4 x 100 ml	45 x 117				
	75003707	20	50 ml DIN Round Bottom Tube	12 x 50 ml	34.5 x 105				
	75003799	21	50 ml Round Bottom Tube	16 x 50 ml	28.5 x 114				
	75003683	22	50 ml Conical Tube	16 x 50 ml	29.5 x 116				
	75003703	23	30/25 ml DIN Round/Flat Bottom Tube	20 x 30 ml	25.5 x 108				
	75003706	24	25 ml Universal Tube	12 x 20 ml	25 x 110				
	75003682	25	15 ml Conical Tube	36 x 15 ml	17 x 121				
	75003794	26	15 ml Blood Collection Tube (17 x 125 mm)	16 x 15 ml	15.5 x 131				
	75003704	27	15 ml Round Bottom Tube (Sarstedt®)	40 x 15 ml	17 x 105				
	75003798	28	14 ml Conical Urine Tube	28 x 14 ml	17 x 112				
	75003681	29	10 ml Blood Collection or 15 ml Corex/Kimble Tube	56 x 10/15 ml	17 x 113				
	75003680	30	5/7 ml Blood Collection Tube (Vacutainer®)	76 x 5/7 ml	13 x 110				
	75003825		4.5/6 ml Blood Collection Tube (Greiner®)	64 x 4.5/6 ml	13 x 110				
	75003793	31	3 ml RIA or Round Bottom Tube (without cap)	76 x 3/5 ml	11 x 110				
	75003700	32	1.5/2 ml Conical Microtube	136 x 2 ml	11 x 45				





	Thermo Sci	entifi	c Rotors and Adapters			Heraeus M 16/1	0 0	Heraeus Mo 40/40	
	Cat. No		Description	Rotor Capacity (Places x Volume)	Max Tube Dimensions (Ø x L, mm)	Max Speed (rpm)	Max RCF (xg)	Max Speed (rpm)	Max RCF (xg)
	75003607		TX-750 Swinging Bucket Rotor						
	75003608		Round Buckets (set of 4), 90°, R _{max} 195 mm	4 x 750 ml		n/a	n/a	4700	4816
-	75003609		ClickSeal Biocontainment Lids for Round Buckets (set of 4)					
	75003610		Replacement O-rings for Lids (set of 4)						
			Adapters for Round Buckets (sets of 4 unless otherwise no	ted)					
	No adapter needed	1	750 ml Polypropylene Bio-Bottle (75003699, pkg of 12)	4 x 750 ml	98 x 133				
	Corning no. 43112	4	500 ml Corning® Conical Bottle	4 x 500 ml	98 x 133				
	75003792	2	250 ml Corning Conical Bottle (in open buckets only)	4 x 250 ml	62.5 x 139				
	75003710	3	250 ml Nalgene® Oak Ridge Bottle	4 x 250 ml	62.5 x 139				
	75003710	3	225 ml and 175 ml BD Falcon Conical Bottle +BD no. 352090	4 x 225 ml	62.5 x 139				
	75003710	3	200 ml Nunc™ Conical Bottle + Nunc no. 377585	4 x 200 ml	62.5 x 139				
	75003710	3	175 ml Nalgene Bottle + Nalgene no. DS3126-0175	4 x 175 ml	62.5 x 139				
	75003713	4	100 ml Round Bottom Open-Top Tube	8 x 100 ml	45 x 123				
	75003714	5	50 ml Conical Tube (includes sealing vessel)*	12 x 50 ml	29.5 x 120				
	75003638	6	50 ml Conical Tube	28 x 50 ml	29.5 x 120				
	75003715	7	50 ml Round Bottom Tube	28 x 50 ml	29.5 x 120				
	75003824	8	50 ml Conical or Skirted Tube	20 x 50 ml	29.5 x 120				
	75003716	9	25 ml Universal Conical or Skirted Tube	28 x 25 ml	25.5 x 120				
	75003639	10	15 ml Conical Tube	56 x 15 ml	17 x 122				
	75003719	1	15 ml Blood Collection Tube (17 x 125 mm) (inner circle only	32 x 15 ml	17 x 134				
	75003718	12	14 ml Conical Urine Tube	48 x 14 ml	18 x 124				
	75003719	1	10 ml Blood Collection or 15 ml Corex/Kimble Tube	84 x 10/15 ml	17 x 117				
	75003723	B	5/7 ml or 4.5/6 ml Blood Collection Tube Blood	108 x 5/7 ml	13 x 116				
	75003724	14	5 ml RIA or Round Bottom Tube (without cap)	148 x 5 ml	13 x 111				
	75003732	14	5/7 ml Round Bottom Tube (without cap) with Decanting Aid	148 x 5/7 ml	13 x 111				
	75003733	15	1.5/2 ml Conical Microtube	192 x 2 ml	11 x 50				
	75008383	16	T-75 Nunc Easy Flask (set of 2)	4 x T-75	-				
	75008384	(T-25 Nunc Easy Flask (set of 2)	8 x T-25	-				

¹ Buckets and lids sold separately

^{*}Sealed vessels can also be used with certified ClickSeal lids for double biocontainment protection.



	Thermo S	cientific	Rotors and Adapters			Heraeus Megafuge 16/16R		Heraeus Megafuge 40/40R	
	Cat. No		Description	Rotor Capacity (Places x Volume)	Max Tube Dimensions (Ø x L, mm)	Max Speed (rpm)	Max RCF (xg)	Max Speed (rpm)	Max RCF (xg)
			TX-750 Swinging Bucket Rotor (continued)						
	75003614	18	Rectangular Buckets (set of 4), 90°, R _{max} 195 mm	4 x 250 ml		n/a	n/a	4500 4700 ³ 4300 ⁴	4415 4816 ³ 4031 ⁴
4	75003615		ClickSeal Biocontainment Lids for Rectangular Bucl	cets (set of 4)					
	75003616		Replacement O-rings for Lids (set of 4)						
			Adapters for Rectangular Buckets (sets of 4)						
	75003737	19	250 ml Flat Bottom Bottle	4 x 250 ml	63 x 130				
	75003738	20	150 ml Round Bottom Open-Top Tube	4 x 150 ml	56 x 124				
	75003742	21	100 ml Round Bottom Open-Top Tube	4 x 100 ml	46 x 124				
	75003685	22	50 ml Conical Tube	20 x 50 ml	30 x 121				
	75003749	23	50 ml Round Bottom Tube	12 x 50 ml	35 x 121				
	75003750	24	45 ml Flat/Round Tube	16 x 45 ml	30 x 121				
	75003755	25	25 ml Universal Tube	16 x 25 ml	26 x 121				
	75003756	26	25 ml DIN Round Bottom Tube	24 x 25 ml	26 x 121				
	75003684	27	15 ml Conical Tube	48 x 15 ml	17 x 120				
	75003758	28	14 ml Flanged Round Bottom Tube	36 x 14 ml	18 x 121				
	75003759	29	15 ml Conical Urine Tube	36 x 15 ml	17 x 124				
	75003767	30	10 ml Blood Collection or 15 ml DIN Tube	64 x 10/15 ml	17 x 118				
	75003768	31	5/7 ml or 4.5/6 ml Blood Collection Tube	80 x 5/7 ml	14 x 118				
	75003769	32	5/7 ml Round Bottom Tube	112 x 5/7 ml	13 x 119				
	75003770	33	1.5/2 ml Conical Microtube	224 x 2 ml	11 x 50				
	75003795 (set 75003617 (set	,	Carriers for microplates and T-75 Horizontal Flasks, including plate trays and neoprene pad, 90° R _{max} 155 mm	4 x 4 Standard or 4 x 1 Deepwell	H _{max} : 60 mm	n/a	n/a	4700	3828

 $^{^{\}rm 3}$ 230 V refrigerated centrifuge

⁴ 120 V ventilated and refrigerated centrifuge



	Thermo S	Scientific	Rotors and Adapters			Heraeus M 16/16	0 0	Heraeus N 40/4	0 0
			Ro	otor Capacity	Max Tube	Max	Max	Max	Max
	Cat. No		Description	(Places x Volume)	Dimensions (Ø x L, mm)	Speed (rpm)	RCF	Speed (rpm)	RCF
			•	voiuiiie)	(Ø X L, IIIII)	(i þili)	(xg)	(i þili)	(xg)
	75003667		BIOLiner High Capacity Rotor						
_	75003668		BIOLiner Buckets (set of 4), 90°, R _{max} 200 mm	4 x 750 ml		n/a	n/a	3500	2739
1	75003669		ClickSeal Biocontainment Lids for BIOLiner Buckets (set o	of 4)					
	75003688		Replacement O-rings for Lids						
			Adapters for BIOLiner Buckets (sets of 4)						
	75003692	1	750 ml Flat Bottom Bottle with all round adapters listed						
			for TX-750 round bucket	4 x 750 ml	98 x 124				
	75003692		500 ml Corning Conical Bottle + Corning cushion no. 431124	4 x 500 ml	98 x 124				
	75003691		250 ml Corning Conical Bottle ⁵	4 x 250 ml	62 x 145				
	75003675		250 ml Nalgene Oak Ridge Bottle	8 x 250 ml	62 x 130				
	75003675		225 ml and 175 ml BD Falcon Conical Bottle + BD no. 352090	8 x 225 ml	62 x 130				
	75003675	3	200 ml Nunc Conical Bottle + Nunc cushion no. 377585	8 x 175 ml	62 x 130				
	75003674	4	50 ml Conical Tube	40 x 50 ml	30 x 120				
	75003673	5	15 ml Conical Tube	88 x 15 ml	17.5 x 121				
	75003697		9/10 ml Blood Collection Tube (Sarstedt)	100 x 9/10 ml	17 x 110				
	75003672	6	10 ml Blood Collection Tube	148 x 10 ml	17 x 110				
	75003671	7	5/7 ml Blood Collection Tube (Vacutainer)	196 x 5/7 ml	14 x 110				
	75003709		4.5/6 ml Blood Collection Tube (Greiner)	164 x 4.5/6 ml	14 x 110				
	75003796	(set of 2)	Microplate Carriers for BIOLiner Rotor, R _{max} 179 mm 4 x 4	4 Standard or	H _{max} : 60 mm				
	75003670	(set of 4)	-	x 1 Deepwell		n/a	n/a	3500	2451
1	75003689		Sealing Lids for BIOLiner Microplate Carriers (set of 4)			,	,		
	75003626		Replacement O-rings for Microplate Carrier Lids (set of 4)						
			, illax	3 Standard or					
	75003624			x 1 Deepwell	H _{max} : 65 mm	4000	2272	4000	2272
-	75003625		Sealed Carriers, includes trays and lids (set of 2)		H _{max} : 45 mm				
-	75002011		Replacement Sealing Lids (set of 2)						
_	75002012		Replacement O-rings (set of 4 with grease)						

¹ Buckets and lids sold separately ⁵ In open buckets only

Swinging Bucket Rotors



	Thermo Sc	ientific	Rotors and Adapters			Heraeus N 16/1		Heraeus Megafuge 40/40R	
	Cat. No		Ro Description	tor Capacity (Places x Volume)	Max Tube Dimensions (Ø x L, mm)	Max Speed (rpm)	Max RCF (xg)	Max Speed (rpm)	Max RCF (xg)
*	75003621		BIOShield 720 High Speed Swinging Bucket Ro 90°, R _{max} 162 mm Adapters for BIOShield 720 Rotor (sets of 4)	tor, 4 x 180 ml		5300	5088	n/a	n/a
	75003693 75003813 75003814	8	180 ml Polypropylene Screw Cap Bottle (75003800, pkg of 12 150 ml Round Bottom Open-Top Tube 100 ml Round Bottom Open-Top Tube	4 x 150 ml 4 x 100 ml	56 x 123 50 x 122 44 x 120				
	75003677 75003816 75003818	10 11 12	50 ml Conical Tube 50 ml DIN Round Bottom Tube 25 ml Universal Tube	8 x 50 ml 8 x 50 ml 16 x 25 ml	34.5 x 116 34 x 109 22.5 x 105				
	75003817 75003678 75003820	13 14 15	25 ml DIN Round Bottom Tube 15 ml Conical Tube 15 ml Sarstedt Tube	20 x 25 ml 24 x 15 ml 44 x 15 ml	25 x 107 17 x 120 17 x 103				
	75003701 75003821 75003822	16 17 18	10 ml Blood Collection Tube 5/7ml Blood Collection Tube 5/7ml Round Bottom Open-Top Tube	48 x 10 ml 48 x 5/7 ml 80 x 5/7 ml	17 x 105 13 x 106 13 x 104				
•	75003823 75003603	19	1.5/2ml Conical Microtube BIOShield 1000A High Speed Swinging Bucket 90°, R _{max} 178 mm Adapters for BIOShield 1000A Rotor (sets of 4)	160 x 2 ml Rotor, 4 x 250 ml	11 x 45	n/a	n/a	5300	5590
	75003737	20	250 ml Nalgene Flat Bottom Bottle	4 x 250 ml	62.5 x 124				
	75003738 75003742	21 22	150 ml Round Bottom Open-Top Tube 100 ml Round Bottom Open-Top Tube	4 x 150 ml 4 x 100 ml	56.5 x 119 45.5 x 120				
	75003643 75003749	23 24	50 ml Conical Tube 50 ml Round Bottom Tube	16 x 50 ml	29.5 x 117 35 x 113				
	75003750 75003755	25 26	45 ml Flat/Round Tube 25 ml Universal Tube	16 x 45 ml 16 x 25 ml	30 x 113 26 x 113				
	75003756 75003642	27	25 ml DIN Round Bottom Tube 15 ml Conical Tube	24 x 25 ml 36 x 15 ml	25.5 x 113 17 x 121				
	75003758 75003759 75003767	30 31	14 ml Flanged Round Bottom Tube 15 ml Conical Urine Tube 10 ml Blood Collection or 15 ml DIN Tube	36 x 14 ml 36 x 15 ml 64 x 10/15 ml	18 x 113 17 x 115 17 x 109				
	75003768 75003769	32	5/7 ml Blood Collection Tube 5/7 ml Round Bottom Tube	80 x 5/7 ml	14 x 109 13 x 110				
	75003770	34	1.5/2 ml Conical Microtube	224 x 2 ml	11 x 50				

Fixed Angle Rotors







CLINIConic Fixed Angle Rotor

				11	No moderne	Цене	Nov-1
Thermo Scie	entific Rotors and Adapters			Heraeus N 16/1	0 0	Heraeus N 40/4	
Description		Rotor Capacity (Places x Volume)	Max Tube Dimensions (Ø x L, mm)	Max Speed (rpm)	Max q RCF (x g)	Max Speed (rpm)	Max RCF (x g
75003698	Fiberlite F15-6x100y Fixed Angle R 25°, R _{max} 98 mm	otor, 6 x 100 ml	38 x 105	13000	18516	13000	1851
021-069031	O-ring Refresher Kit	0 X 100 IIII	30 X 103	13000	10310	13000	100
021-009031	Adapters for F15-6x100y Rotor (sold separa	tolu\					
No advance de d	94 ml Nalgene Tube	6 x 94 ml	20 v 10E				
No adapter needed 75003103	50 ml Conical Tube	6 x 50 ml	38 x 105 30 x 121				
75003103	15 ml Conical Tube	6 x 15 ml	17 x 123				
75003093	50 ml Round Bottom Tube	6 x 50 ml	30 x 117				
75003102	38 ml Round Bottom Tube	6 x 38 ml	26 x 110				
76002906	16 ml Round Bottom Tube	6 x 36 ml	18 x 123				
75002900	12 ml Round Bottom Tube	12 x 12 ml	16 x 95				
75003093	6.5 ml Round Bottom Tube	12 x 6.5 ml	13 x 114				
75003092 75003091	3.5 ml Round Bottom Tube	24 x 3.5 ml	11 x 100				
76002905	1.5/2 ml Conical Microtube	24 x 3.5 ml	11 x 40				
75003620							
	45°, R _{max} 126 mm Replacement Sealing O-rings (set of 2 with	6 x 94 ml	38 x 105	8500	10178	10350	1509
	Replacement Sealing O-rings (set of 2 with	grease)	38 x 105	8500	10178	10350	1509
75003058		grease) rately)		8500	10178	10350	1509
75003058 No adapter needed	Replacement Sealing O-rings (set of 2 with Adapters for HIGHConic II Rotor (sold sepa	grease)	38 x 105 38 x 105 29.5 x 117	8500	10178	10350	1509
75003058 No adapter needed 75003103	Replacement Sealing O-rings (set of 2 with Adapters for HIGHConic II Rotor (sold sepa 94 ml Round Bottom Tube	grease) rately) 6 x 94 ml	38 x 105	8500	10178	10350	1509
75003058 No adapter needed 75003103 75003095	Replacement Sealing O-rings (set of 2 with Adapters for HIGHConic II Rotor (sold sepa 94 ml Round Bottom Tube 50 ml Conical Tube	grease) rately) 6 x 94 ml 6 x 50 ml	38 x 105 29.5 x 117	8500	10178	10350	1509
75003058 No adapter needed 75003103 75003095 75003102	Replacement Sealing O-rings (set of 2 with Adapters for HIGHConic II Rotor (sold sepa 94 ml Round Bottom Tube 50 ml Conical Tube 15 ml Conical Tube	grease) rately) 6 x 94 ml 6 x 50 ml 6 x 15 ml	38 x 105 29.5 x 117 17 x 123	8500	10178	10350	1509
75003058 No adapter needed 75003103 75003095 75003102 75003094	Replacement Sealing O-rings (set of 2 with Adapters for HIGHConic II Rotor (sold sepa 94 ml Round Bottom Tube 50 ml Conical Tube 15 ml Conical Tube 50 ml Round Bottom Tube	grease) rately) 6 x 94 ml 6 x 50 ml 6 x 15 ml 6 x 50 ml	38 x 105 29.5 x 117 17 x 123 29.4 x 117	8500	10178	10350	1509
75003058 No adapter needed 75003103 75003095 75003102 75003094 76002906	Replacement Sealing O-rings (set of 2 with Adapters for HIGHConic II Rotor (sold sepa 94 ml Round Bottom Tube 50 ml Conical Tube 15 ml Conical Tube 50 ml Round Bottom Tube 38 ml Round Bottom Tube	grease) rately) 6 x 94 ml 6 x 50 ml 6 x 15 ml 6 x 50 ml 6 x 38 ml	38 x 105 29.5 x 117 17 x 123 29.4 x 117 26 x 110	8500	10178	10350	1509
75003058 No adapter needed 75003103 75003095 75003102 75003094 76002906 75003093	Replacement Sealing O-rings (set of 2 with Adapters for HIGHConic II Rotor (sold sepa 94 ml Round Bottom Tube 50 ml Conical Tube 15 ml Conical Tube 50 ml Round Bottom Tube 38 ml Round Bottom Tube 16 ml Round Bottom Tube	grease) rately) 6 x 94 ml 6 x 50 ml 6 x 15 ml 6 x 50 ml 6 x 38 ml 6 x 16 ml	38 x 105 29.5 x 117 17 x 123 29.4 x 117 26 x 110 18 x 123	8500	10178	10350	1509
75003058 No adapter needed 75003103 75003095 75003102 75003094 76002906 75003093 75003092	Replacement Sealing O-rings (set of 2 with Adapters for HIGHConic II Rotor (sold sepa 94 ml Round Bottom Tube 50 ml Conical Tube 15 ml Conical Tube 50 ml Round Bottom Tube 38 ml Round Bottom Tube 16 ml Round Bottom Tube 12 ml Round Bottom Tube	grease) rately) 6 x 94 ml 6 x 50 ml 6 x 15 ml 6 x 50 ml 6 x 38 ml 6 x 16 ml 12 x 12 ml	38 x 105 29.5 x 117 17 x 123 29.4 x 117 26 x 110 18 x 123 16 x 95	8500	10178	10350	1509
75003058 No adapter needed 75003103 75003095 75003102 75003094 76002906 75003093 75003092 75003091	Replacement Sealing O-rings (set of 2 with Adapters for HIGHConic II Rotor (sold sepa 94 ml Round Bottom Tube 50 ml Conical Tube 15 ml Conical Tube 50 ml Round Bottom Tube 38 ml Round Bottom Tube 16 ml Round Bottom Tube 12 ml Round Bottom Tube 6.5 ml Round Bottom Tube	grease) rately) 6 x 94 ml 6 x 50 ml 6 x 15 ml 6 x 50 ml 6 x 38 ml 6 x 16 ml 12 x 12 ml 12 x 6.5 ml	38 x 105 29.5 x 117 17 x 123 29.4 x 117 26 x 110 18 x 123 16 x 95 13.5 x 114	8500	10178	10350	1509
75003058 No adapter needed 75003103 75003095 75003102 75003094 76002906 75003093 75003092 75003091 76002905	Replacement Sealing O-rings (set of 2 with Adapters for HIGHConic II Rotor (sold sepa 94 ml Round Bottom Tube 50 ml Conical Tube 15 ml Conical Tube 50 ml Round Bottom Tube 38 ml Round Bottom Tube 16 ml Round Bottom Tube 12 ml Round Bottom Tube 3.5 ml Round Bottom Tube 3.5 ml Round Bottom Tube 1.5/2 ml Conical Microtube CLINIConic Fixed Angle Rotor, 37°,	grease) 6 x 94 ml 6 x 50 ml 6 x 15 ml 6 x 50 ml 6 x 50 ml 6 x 16 ml 12 x 12 ml 12 x 6.5 ml 24 x 2 ml	38 x 105 29.5 x 117 17 x 123 29.4 x 117 26 x 110 18 x 123 16 x 95 13.5 x 114 11 x 100	\$500 	4997	10350 n/a	1509
75003058 No adapter needed 75003103 75003095 75003102 75003094 76002906 75003093 75003092 75003091 76002905	Replacement Sealing O-rings (set of 2 with Adapters for HIGHConic II Rotor (sold sepa 94 ml Round Bottom Tube 50 ml Conical Tube 15 ml Conical Tube 50 ml Round Bottom Tube 38 ml Round Bottom Tube 16 ml Round Bottom Tube 12 ml Round Bottom Tube 6.5 ml Round Bottom Tube 3.5 ml Round Bottom Tube 1.5/2 ml Conical Microtube	grease) 6 x 94 ml 6 x 50 ml 6 x 15 ml 6 x 50 ml 6 x 50 ml 6 x 16 ml 12 x 12 ml 12 x 6.5 ml 24 x 2 ml	38 x 105 29.5 x 117 17 x 123 29.4 x 117 26 x 110 18 x 123 16 x 95 13.5 x 114 11 x 100 11 x 40				
75003058 No adapter needed 75003103 75003095 75003102 75003094 76002906 75003093 75003092 75003091 76002905	Replacement Sealing O-rings (set of 2 with Adapters for HIGHConic II Rotor (sold sepa 94 ml Round Bottom Tube 50 ml Conical Tube 15 ml Conical Tube 50 ml Round Bottom Tube 38 ml Round Bottom Tube 16 ml Round Bottom Tube 12 ml Round Bottom Tube 3.5 ml Round Bottom Tube 3.5 ml Round Bottom Tube 1.5/2 ml Conical Microtube CLINIConic Fixed Angle Rotor, 37°,	grease) 6 x 94 ml 6 x 50 ml 6 x 15 ml 6 x 50 ml 6 x 50 ml 6 x 16 ml 12 x 12 ml 12 x 6.5 ml 24 x 2 ml	38 x 105 29.5 x 117 17 x 123 29.4 x 117 26 x 110 18 x 123 16 x 95 13.5 x 114 11 x 100 11 x 40				
75003058 No adapter needed 75003103 75003095 75003102 75003094 76002906 75003093 75003092 75003091 76002905 75003623 No adapter needed	Replacement Sealing O-rings (set of 2 with Adapters for HIGHConic II Rotor (sold sepa 94 ml Round Bottom Tube 50 ml Conical Tube 15 ml Conical Tube 50 ml Round Bottom Tube 38 ml Round Bottom Tube 16 ml Round Bottom Tube 12 ml Round Bottom Tube 6.5 ml Round Bottom Tube 3.5 ml Round Bottom Tube 1.5/2 ml Conical Microtube CLINIConic Fixed Angle Rotor, 37°, Adapters for CLINIConic Rotor	grease) rately) 6 x 94 ml 6 x 50 ml 6 x 15 ml 6 x 50 ml 6 x 38 ml 6 x 16 ml 12 x 12 ml 12 x 6.5 ml 24 x 3.5 ml 24 x 2 ml	38 x 105 29.5 x 117 17 x 123 29.4 x 117 26 x 110 18 x 123 16 x 95 13.5 x 114 11 x 100 11 x 40 30 x 15 ml				
75003058 No adapter needed 75003103 75003095 75003102 75003094 76002906 75003093 75003092 75003091 76002905 75003623 No adapter needed 75003702 11172596	Replacement Sealing O-rings (set of 2 with Adapters for HIGHConic II Rotor (sold sepa 94 ml Round Bottom Tube 50 ml Conical Tube 15 ml Conical Tube 50 ml Round Bottom Tube 38 ml Round Bottom Tube 16 ml Round Bottom Tube 12 ml Round Bottom Tube 3.5 ml Round Bottom Tube 3.5 ml Round Bottom Tube 1.5/2 ml Conical Microtube CLINIConic Fixed Angle Rotor, 37°, Adapters for CLINIConic Rotor 15 ml Round/Conical Bottom Tube	grease) rately) 6 x 94 ml 6 x 50 ml 6 x 15 ml 6 x 50 ml 6 x 38 ml 6 x 16 ml 12 x 12 ml 12 x 6.5 ml 24 x 3.5 ml 24 x 2 ml Rmax 140 mm	38 x 105 29.5 x 117 17 x 123 29.4 x 117 26 x 110 18 x 123 16 x 95 13.5 x 114 11 x 100 11 x 40 30 x 15 ml				1509 n/a





Microliter 48x2 Sealed Aluminum Fixed Angle Rotor

Microliter 30x2 Sealed Aluminum Fixed Angle Rotor

	Thermo Scie	entific Rotors and Adapters			Heraeus N 16/1	0 0	Heraeus N 40/4	
	Description		Rotor Capacity (Places x Volume)	Max Tube Dimensions (Ø x L, mm)	Max Speed (rpm)	Max RCF (x g)	Max Speed (rpm)	Max RCF (x g)
		8x50 ml Individually Sealed Fixed Angle			6700	7177	n/a	n/a
	75003694	45°, R _{max} 143 mm	8 x 50 ml		6500 ⁴	6755 ⁴	n/a	n/a
	75003689	Replacement O-rings (set of 12)						
		Adapters for 8x50 ml Sealed Rotor						
	No adapter needed	50 ml Conical Tube	8 x 50 ml	29.5 x 116				
		Fiberlite F21-48x2 Fixed Angle Rotor,						
- 🐵	75003664	45°, R _{max} 97 mm	48 x 2 ml	11 x 50	n/a	n/a	15200	25055
	021-489021	O-ring Refresher Kit						
		Adapters for F21-48x2 Rotor (sets of 24)						
	76003750	0.2 ml PCR Tube	48 x 0.25 ml	6 x 20				
	76003758	0.5 ml Microtube	48 x 0.5 ml	8 x 44				
	76003759	0.25 ml Microtube	48 x 0.25 ml	6 x 46				
		Microliter 30x2 Sealed Aluminum Fixed	Angle Rotor					
1	75003652	45°, R _{max} 100 mm	30 x 2 ml	11 x 50	15200	25830	n/a	n/a
		Adapters for Microliter 30x2 Rotor (sets of 24)					•	
	76003750	0.2 ml PCR Tube	30 x 0.25 ml	6.5 x 20				
	76003758	0.5 ml Microtube	30 x 0.5 ml	8 x 44				
	76003759	0.25 ml Microtube	30 x 0.25 ml	6 x 46				
		Microliter 48x2 Sealed Aluminum Fixed						
	75003602	Angle Rotor, 45°, R _{max} 98 mm	48 x 2 ml	11 x 50	n/a	n/a	15200	25314
_		Adapters for Microliter 48x2 Rotor (sets of 24)						
	76003750	0.2 ml PCR Tube	48 x 0.25 ml	6.5 x 20				
	76003758	0.5 ml Microtube	48 x 0.5 ml	8 x 44				
	76003759	0.25 ml Microtube	48 x 0.25 ml	6 x 46				

⁴120 V ventilated and refrigerated centrifuge

Thermo Scientific Heraeus Megafuge Centrifuge Series





Specifications	Heraeus Megafuge 16/16R	Heraeus Megafuge 40/40R				
Swinging Bucket Rotors						
Max Capacity	4 x 400 ml (with TX-400 rotor)	4 x 750 ml (with TX-750 and BIOLiner rotors)				
Max Speed	5500 rpm (with TX-200 rotor)	5300 rpm (with BIOShield 1000A rotor)				
Max RCF	5580 x g (with TX-200 rotor)	5590 x g (with BIOShield 1000A rotor)				
Fixed Angle Rotors						
Max Capacity	6 x 100 ml (with F15-6x100 rotor)	6 x 100 ml (with F15-6x100 rotor)				
Max Speed	15200 rpm (with 30x2 ml rotor)	15200 rpm (with 48x2 ml rotor)				
Max RCF	25830 x g (with 30x2 ml rotor)	25314 x g (with 48x2 ml rotor)				
Control System	Microp	rocessor				
Drive System	Direct, brushless indu	ction low profile motor				
Rotor Locking System	Auto-	Lock III				
Imbalance Detection System	SMAF	RTSpin				
Programs	6, direc	t access				
Temperature Set Range*	-10 °C to +40 °C					
Pre-Cooling Function*	Yes, with direct button					
Refrigeration System*	CFC free					
Pulse (Short) Run	Υ	es				
Acceleration/ Deceleration Rates	9/ 10					
Centrifugation Chamber	Stainless Steel					
Max Timer Range	9h, 99min -	r continuous				
Sound Level (dBA), with swinging bucket rotor at top speed	< 61/<55* dB (TX-400)	< 61/< 57* (TX-750)				
Other Features	Certified ClickSeal biocontainment syste	m, language selection, motorized lid latch				
Max Power Consumption (W) 120V	850/1200*	1400				
230V	1010/ 1400*	1700/1950*				
Max Heat Output (BTU/h) 120V	2900/ 4096*	4776				
230V	3447/ 4776*	5800/ 6653*				
Dimensions						
Height (lid open)	87 cm/ 34.3 in	90 cm/ 35.4 in				
Height (lid closed)	36 cm/ 14.2 in	36 cm/ 14.2 in				
Width	44 cm/ 17.3 in	56.5 cm/ 22.2 in				
	62.3 cm*/ 24.5 in*	74.5 cm*/ 29.3 in*				
Depth	60.5 cm/ 23.8 in	67 cm/ 26.4 in				
Weight	57.5 kg/ 126.8 lb 91.5 kg*/ 201.7 lb*	86 kg/ 189.6 lb 116 kg*/ 255.7 lb*				
Technical Standards		1 230 V only: EN 292, EN 61326, EN 55011B				
Certifications		/ Certified Biosafety, RoHS compliant, WEE compliant				
Ordering Information	Heraeus Megafuge 16/16R	Heraeus Megafuge 40/40R				
Heraeus Megafuge, ventilated, 230 V, 50/60 Hz	75004230	75004503				
Heraeus Megafuge, ventilated, 120 V, 60 Hz	75004231	75004504				
Heraeus Megafuge, refrigerated, 230 V, 50/60 Hz	75004270	75004518				
Heraeus Megafuge, refrigerated, 120 V, 60 Hz	75004271	75004519				

^{*}Refrigerated models









The quality of the procedures used to design, manufacture, sell and service the Heraeus Megafuge 16 and Megafuge 40 centrifuge series is certified and maintained in accordance to the **ISO 13485** international standard. Our effort to continuously improve our formalized business processes is certified and regularly audited in conformance with **ISO 9000** family of Quality Standards.

© 2009, 2011 Thermo Fisher Scientific Inc. All rights reserved. HERAEUS is a registered trademark of Heraeus Holding GmbH licensed to Thermo Fisher Scientific. Corning and Corex are registered trademarks of Corning Inc. Kimble is a registered trademark of Kimble Glass. Greiner is a registered trademark of Greiner. Vacutainer and BD Falcon is a registered trademark of BD Biosciences. Sarstedt is a registered trademark of Sarstedt, Inc. All other trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries. Specifications, terms and pricing are subject to change. Not all products are available in all countries. Please consult your local sales representative for details.

North America: USA/Canada +1 866 984 3766 (866-9-THERMO)

www.thermoscientific.com/centrifuge

Europe: Austria +43 1 801 40 0, Belgium +32 53 73 42 41, France +33 2 2803 2180, Germany national toll free 08001-536 376, Germany international +49 6184 90 6940, Italy +39 02 95 05 92 54, Netherlands +31 76 579 55 55, Nordic/Baltic countries +358 9 329 10200, Russia/CIS +7 (812) 703 42 15, Spain/Portugal +34 93 223 09 18, Switzerland +41 44 454 12 12, UK/Ireland +44 870 609 9203

Asia: Australia +61 39757 4300, China +86 21 6865 4588 or +86 10 8419 3588, India toll free 1800 22 8374, India +91 22 6716 2200, Japan +81 45 453 9220, New Zealand +64 9 980 6700, Other Asian countries +852 2885 4613 Countries not listed: +49 6184 90 6940

