

TECHNE

Techne® Prime Thermal Cycler Range

Personal thermal cyclers

Mid-sized thermal cyclers

Full-size thermal cyclers

Gradient cycling

New Combi-Block

Touchscreen Interface

Upgradable software

4 year warranty



Thermal Cycling at a Glance

Techne® have upgraded our established thermal cycler range to provide easier programming and increased instrument flexibility. The Prime range has been designed to enhance the user experience with an outstanding touch interface and identical software for all models. The new range provides high performance, exceptional value and a reliability backed by the market leading 4 year warranty.



Personal Cycler



Mid-sized Cycler



Model	³ Prime	³ PrimeX	³ PrimeG
Block formats	24x 0.2ml 18x 0.5ml	48x 0.2ml 30x 0.5ml	48x 0.2ml 30x 0.5ml
Maximum ramp rate	3.0°C/s	3.0°C/s	3.0°C/s
Temperature accuracy*	<±0.25°C	<±0.25°C	<±0.25°C
Temperature uniformity*	<±0.3°C	<±0.3°C	<±0.3°C
Program Interface	3.5" VGA touch screen	3.5" VGA touch screen	3.5" VGA touch screen
Stored programs	1000	1000	1000
Adjustable heated lid	Fixed	•	•
Gradient Range	-	Can be upgraded to ³ PrimeG spec	30 - 80°C
Max Gradient	-	-	14°C
Dimensions (w x d x h), mm	210 x 350 x 180	210 x 350 x 180	210 x 350 x 180
Licensed for gradient	-	-	•
Warranty	4 years	4 years	4 years

* Recorded at 55°C for ³Prime and Prime





Full-sized Cycler

Prime	PrimeG
96x 0.2ml	96x 0.2ml
60x 0.5ml	60x 0.5ml
384 well plate	384 well plate
Combi-Block 33x 0.2ml and 33x 0.5ml	Combi-Block 33x 0.2ml and 33x 0.5ml
3.4°C/s	3.4°C/s
<±0.25°C	<±0.25°C
<±0.3°C	<±0.3°C
5.7" VGA touch screen	5.7" VGA touch screen
1000	1000
•	•
Can be upgraded to PrimeG spec	30 - 80°C
-	29°C, 25°C Combi-Block, 19°C 384-well
240 x 420 x 240	240 x 420 x 240
-	•
4 years	4 years



The Techne® Prime Range

Techne® has developed a comprehensive new range of thermal cyclers around its belief that all users deserve PCR without compromise. Our design philosophy has focused on delivering an enhanced user experience on all models.

- Total reliability with 4 year warranty
- Touchscreen interface on all models
- High performance cycling block
- USB software upgrade and program transfer
- Unique gradient upgrade function
- Exceptional value for money



Format and Throughput Flexibility

- Personal, mid-sized and full size block models
- Wide choice of blocks with 0.2ml, 0.5ml, 384-well and Combi-Block options
- Use the consumables of your choice

Modern thermal cycling

- Touch interface with pre-programmed templates for fast protocol creation
- Choice of program creation view - graphical or list

Helping to Manage a Budget

Techne® believe that not only do our instruments offer the most affordable thermal cycler solutions on the market but that you should only pay for what you need when you need it. The Prime range introduces a unique feature.

- ³PrimeX and Prime units can be upgraded to achieve gradient capability
- Simple and easy process
- No price penalty for upgrading later

Enhanced thermal engine

The Prime range is controlled by a completely redesigned thermal block algorithm to improve temperature profiles and provide a consistent high level of performance run after run.

- Choose a cycler with ramp rate that meets your needs
- Excellent thermal accuracy
- Accurate dwell times prevent non-specific primer binding

Improved Protocol Design

Optimise your protocol design with a true gradient approach. No need to calculate individual zone temperatures and no need for additional programming.

- Gradient calculator automatically sets values across block
- Upgrade to gradient with a simple unlock code
- 14°C-30°C gradient across block (depending on model)



Touchscreen User Interface


The Prime series comes with our outstanding touch interface which provides a familiar premium experience on all instruments in the range. Whether you process a few samples a week or require a network of instruments for high throughput, the interface offers the same look and feel no matter the task.

Techne® Workbench Software

A welcome addition to the Techne® instrument range, the PC application Techne® Workbench is the desktop version of the Techne® touch screen interface. Carrying the same look and feel, Techne Workbench is your one-stop place for all the PCR programs on your computer.

Easily manage your program files

- Frequently or recently used programs are available direct from the home screen
- Effortlessly manage and organise your programs using user names or keywords
- Transfer protocols and temperature logs between instruments and PC via USB

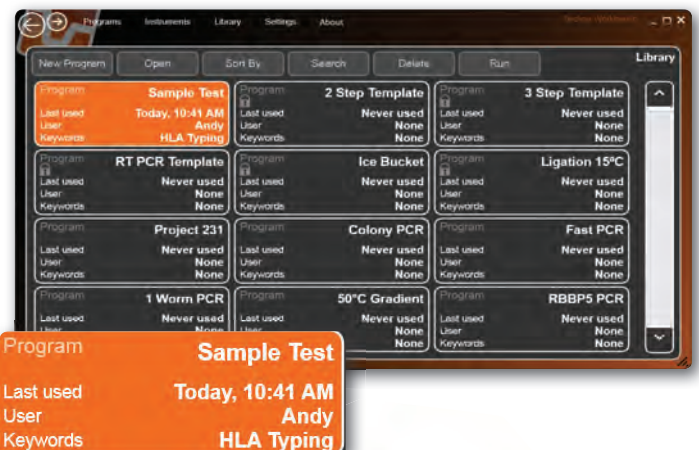

³Prime

The most feature packed personal thermal cycler on the market and the only entry-level cycler to offer programming via a touch interface. With rapid ramp rates and a small footprint it is the ideal instrument for researching and teaching laboratories.



Specifications


	³ Prime	³ PrimeX and ³ PrimeG
Sample capacity: 0.2ml	24	48
Sample capacity: 0.5ml	18	30
Maximum heating rate	3.0°C/s	3.0°C/s
Block temperature range	10°C to 100°C (4°C final hold)	10°C to 100°C (4°C final hold)
Block uniformity at 55°C	<±0.3°C	<±0.3°C
Temperature accuracy at 55°C	<±0.25°C	<±0.25°C
Gradient Range	-	30°C to 80°C
Maximum Gradient	-	14°C
Minimum Gradient	-	1°C
Gradient calculator	-	•
Type	2 peltier element/block	4 peltier element/block
Selectable heated lid temperature	35°C to 115°C or off	35°C to 115°C or off
Heated Lid pressure	Fixed	Adjustable, dependent on consumables
Program interface	3.5" VGA colour touchscreen with graphical display	3.5" VGA colour touchscreen with graphical display
Maximum number of programs stored	1000	1000
Data transfer	USB port	USB port
Auto re-start on power failure	Yes	Yes
Dimensions (w x d x h), mm	210 x 350 x 180	210 x 350 x 180
Weight, kg	6	6
Voltage	100-230V, 50-60Hz	100-230V, 50-60Hz
Power	155W	155W

4 year warranty for the ³Prime thermal cycler



³PrimeX and ³PrimeG

These mid-sized cyclers match all the features of the ³Prime instrument alongside expanded sample capacity and gradient cycling capability.

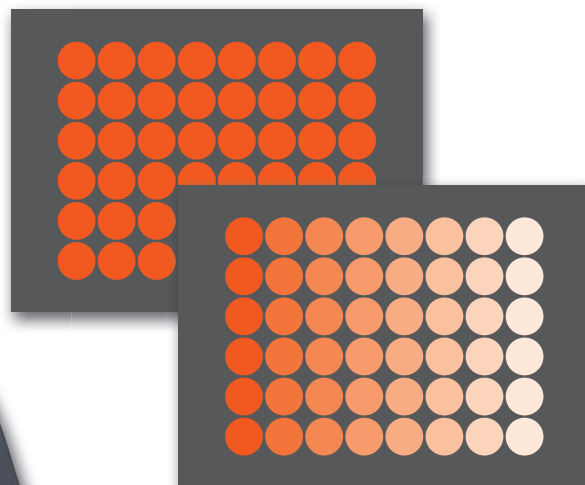

Gradient upgradability

³PrimeX units can be upgraded to achieve gradient capability. The gradient function can be enabled at any time with a simple unlock code without the need for any hardware modifications.

Ordering Information

Description

³Prime thermal cycler, 24 x 0.2ml
³Prime thermal cycler, 18 x 0.5ml
³PrimeX thermal cycler, 48 x 0.2ml
³PrimeX thermal cycler, 30 x 0.5ml
³PrimeX gradient upgrade
³PrimeG gradient thermal cycler, 48 x 0.2ml
³PrimeG gradient thermal cycler, 30 x 0.5ml

Product Code

3PRIMEBASE/02
 3PRIMEBASE/05
 3PRIMEX/02
 3PRIMEX/05
 3PRIMEX/USB
 3PRIMEG/02
 3PRIMEG/05

Replacement Blocks

Exchange of ³Prime thermal cycler blocks must be carried by a trained service engineer

Description

³Prime block, 24 x 0.2ml
³Prime block, 18 x 0.5ml
³PrimeX block, 48 x 0.2ml
³PrimeX block, 30 x 0.5ml

Product Code

3PRIMEBASE/02/B
 3PRIMEBASE/05/B
 3PRIMEX/02/B
 3PRIMEX/05/B

Prime

The Prime instrument is a full sized model that will become your reliable laboratory partner for routine PCR.

- Fast ramp rate of up to 3.4°C/sec
- A wide range of blocks available including 0.2ml, 0.5ml, 384-well and Combi-Block options
- A USB port enables the transfer of programs between instruments and temperature logs to your PC
- Gradient cycling is available directly using the PrimeG instrument or by upgrading the Prime unit



Specifications

	Prime	PrimeG
Sample capacity: 0.2ml	96 (33 in Combi-Block)	96 (33 in Combi-Block)
Sample capacity: 0.5ml	60 (33 in Combi-Block)	60 (33 in Combi-Block)
Sample capacity: 384 well	Yes	Yes
Maximum heating rate	3.4°C/s	3.4°C/s
Block temperature range	10°C to 100°C (4°C final hold)	10°C to 100°C (4°C final hold)
Block uniformity at 55°C	<±0.3°C	<±0.3°C
Temperature accuracy at 55°C	<±0.25°C	<±0.25°C
Gradient	Can be gradient enabled	Yes
Maximum Gradient	n/a	29°C, 25°C for Combi-Block, 19°C for 384
Minimum Gradient	n/a	1°C
Type	8 peltier element/block	8 peltier element/block
Selectable heated lid temperature	35°C to 115°C or off	35°C to 115°C or off
Heated lid pressure	Adjustable, dependent on consumables	Adjustable, dependent on consumables
Program interface	5.7" VGA colour touchscreen	5.7" VGA colour touchscreen
Maximum number of programs stored	1000	1000
Data transfer	USB port	USB port
Auto re-start on power failure	Yes	Yes
Dimensions (w x d x h), mm	240 x 420 x 240	240 x 420 x 240
Weight, kg	9.4	9.4
Voltage	100-230V, 50-60Hz	100-230V, 50-60Hz
Power	450W	450W

4 year warranty for the Prime thermal cycler

The Techne® Prime Combi-Block

Techne have developed a new Combi-block for the Prime range of thermal cyclers. This provides unrivalled flexibility with ability to accommodate 33 x 0.2ml tubes and 33 x 0.5ml tubes, in 6 rows and 11 columns. Prime Combi-Block cyclers are available with or without a temperature gradient, which is upgradable later.

- Flexible 0.2ml and 0.5ml
- Gradient capability
- Total reliability
- Exceptional value for money



0.5ml tubes



0.2ml tubes



Combi-Block

Gradient upgradability

Prime units can be upgraded to achieve gradient capability. The gradient function can be enabled at any time without the need to change a block. The simple process is installed via an unlock code.



Ordering Information

Description	Product Code
Prime thermal cycler, 96 x 0.2ml	5PRIME/02
Prime thermal cycler, 60 x 0.5ml	5PRIME/05
Prime thermal cycler, 384 well plates	5PRIME/384
Prime thermal cycler, Combi-Block	5PRIME/C
Prime gradient upgrade	5PRIMEX/USB
PrimeG gradient thermal cycler, 96 x 0.2ml	5PRIMEG/02
PrimeG gradient thermal cycler, 60 x 0.5ml	5PRIMEG/05
PrimeG gradient thermal cycler, 384 well	5PRIMEG/384
PrimeG gradient thermal cycler, Combi-Block	5PRIMEG/C

Replacement blocks

Exchange of Prime thermal cycler blocks must be carried by a trained service engineer.

Description	Product Code
Prime block, 96 x 0.2ml	5PRIME/02/FB
Prime block, 60 x 0.5ml	5PRIME/05/FB
Prime block, 384 well	5PRIME/384/FB
Prime block, Combi-Block 33x 0.2ml, 33x 0.5ml	5PRIME/C/B